



( 583023357 )

## TEOFERT Avail 40 mit NPPT

No.: H



0.77




3.52 mm












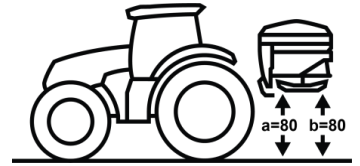
0.77 kg/l



13.6



ZATS															
TS 1	15	31	600	A	1	720	1	28	600	1	38	500	17	-1	200
	16	34	600	A	1	720	1	27	600	1	37	500	17	0	230
	18	34	720	A	1	600	1	24	600	1	34	500	20	-1	210
	20	36	800	A	1	720	1	23	720	1	33	600	21	-1	220
	21	37	900	A	1	800	1	23	800	1	33	720	23	-2	210
	24	42	900	A	1	800	1	22	800	1	32	720	23	1	260
TS 2	21	6	600	B	3	720	3	27	600	3	37	500	22	0	220
	24	8	720	B	3	800	3	27	720	3	37	600	24	-0	210
	27	12	800	B	3	900	3	26	800	3	36	720	26	1	230
	28	11	900	D	X	720	1	25	800	1	35	720	29	-1	200
	30	15	900	D	X	800	1	25	900	1	35	800	29	1	240
TS 3	24	4	600	C	3	720	3	24	600	3	34	500	25	-1	220
	27	7	720	C	3	800	3	23	720	3	33	600	28	-1	210
	28	8	720	C	3	800	3	23	720	3	33	600	28	-0	230
	30	9	900	C	3	900	3	23	800	3	33	720	32	-1	200
	32	12	900	C	3	900	3	22	800	3	32	720	32	-0	230
	33	13	900	D	X	720	1	22	800	1	32	720	32	0	240
	36	17	900	D	X	800	1	22	900	1	32	800	32	2	280






( 583023357 )









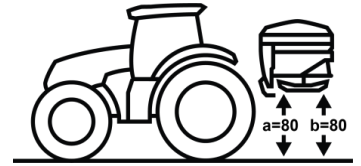

# TEOFERT Avail 40 mit NPPT

No.: H




  
**0.77    3.52 mm    0.77 kg/l    13.6**



ZATS															
TS 10	15	31	600	A	1	720	1	28	600	1	38	500	17	-1	200
	16	34	600	A	1	720	1	27	600	1	37	500	17	0	230
	18	34	720	A	1	600	1	24	600	1	34	500	20	-1	210
	20	36	800	A	1	720	1	23	720	1	33	600	21	-1	220
	21	37	900	A	1	800	1	23	800	1	33	720	23	-2	210
	24	42	900	A	1	800	1	22	800	1	32	720	23	1	260
TS 20	18	15	600	B	3	720	3	29	600	3	39	500	20	-1	190
	20	20	600	B	3	720	3	28	600	3	38	500	20	1	230
	21	22	600	D	X	500	1	27	600	1	37	500	20	2	260
	24	24	800	B	3	900	3	28	800	3	38	720	25	-0	220
	27	27	900	D	X	720	1	26	800	1	36	720	27	0	240
	28	29	900	D	X	720	1	25	800	1	35	720	27	1	260
	30	33	900	D	X	800	1	25	900	1	35	800	27	3	290
TS 30	24	4	600	C	3	720	3	24	600	3	34	500	25	-1	220
	27	7	720	C	3	800	3	23	720	3	33	600	28	-1	210
	28	8	720	C	3	800	3	23	720	3	33	600	28	-0	230
	30	9	900	C	3	900	3	23	800	3	33	720	32	-1	200
	32	12	900	C	3	900	3	22	800	3	32	720	32	-0	230
	33	13	900	D	X	720	1	22	800	1	32	720	32	0	240
	36	17	900	D	X	800	1	22	900	1	32	800	32	2	280

