



(583022835)

Entec® 40 [gr]




0.97



308 sgn 51 lbs/ft³



11.9

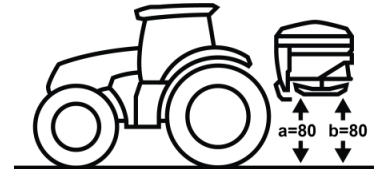

ZATS															
TS 10	50	29	720	A	1	600	1	27	600	1	37	500	57	-2	220
	60	31	800	A	1	720	1	28	720	1	38	600	62	-0	230
	80	41	900	A	1	800	1	24	800	1	34	720	69	13	310
TS 20	60	13	600	B	3	720	3	28	600	3	38	500	59	5	230
	80	21	900	D	X	720	1	28	800	1	38	720	78	2	240
	90	30	900	D	X	800	1	26	900	1	36	800	79	14	320
TS 30	80	1	720	C	3	800	3	25	720	3	35	600	82	-2	220
	90	5	900	C	3	900	3	23	800	3	33	720	93	-1	230
	100	8	900	D	X	800	1	23	900	1	33	800	93	4	260
	111	13	900	D	X	800	1	22	900	1	32	800	94	11	310
	120	17	900	D	X	800	2	22	900	2	32	800	95	19	350
	105	11	900	D	X	800	1	22	900	1	32	800	94	9	290



	Arbeitsbreite		Mengenreduzierung in %
	Einleitsystem		Einschaltpunkt [m]
	Streuscheiben-Drehzahl		Ausschaltpunkt [m]
	Randstreuen		Abwurfwinkel
	Grenzstreuen		Wurfweite
	Grenzgrabenstreuen		Kalibrierfaktor
	Teleskop		Korndurchmesser
	Teleskopposition		Schüttdichte

Zapfwelle	1 : 1.33	Streuscheiben-Drehzahl
375		500
415		550
450		600
540		720
600		800
650		870
675		900
750		1000